


SPECIFICATIONS

Rated thermal input	7,5 kW
Efficiency	82 %
Smoke flue diameter	180 mm
Min. thrust (under pressure) for rated thermal input	10 Pa
Fuel gas temperature	267 °C
Volume of fuel gas	9 g/s
CO emissions in fuel gas (at 13 % O ₂)	0,0673 %
Dust in the fuel gas (at 13 % O ₂)	26 mg/Nm ³
Volume of fuel per hour	2,22 kg/h
Fuel	wood (beech logs)
Weight	351 kg




LIST OF SPARE PARTS

Glass



Carcon stones

1. Front bottom
2. Back bottom
3. Back
4. Corner backside
5. Right side
6. Left side
7. Deflector

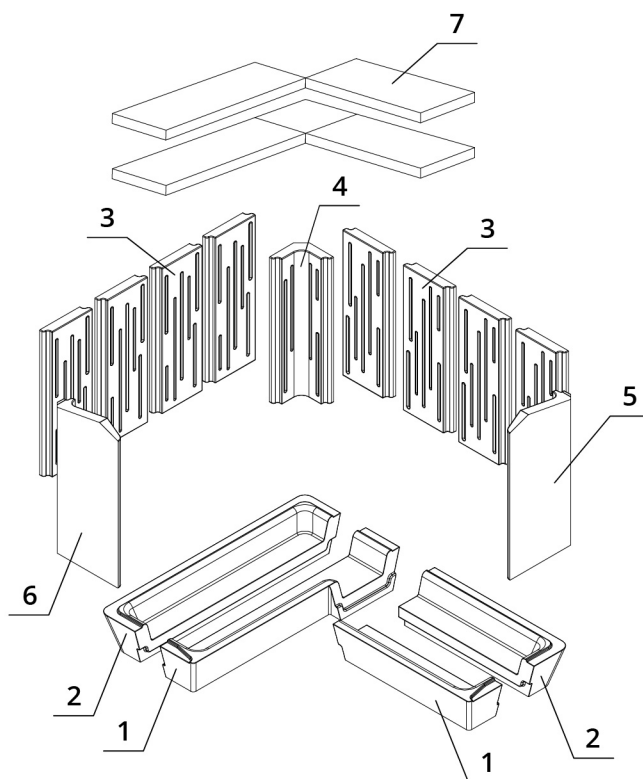


BEF FLAT V 4 L

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

TECHNICAL DRAWING

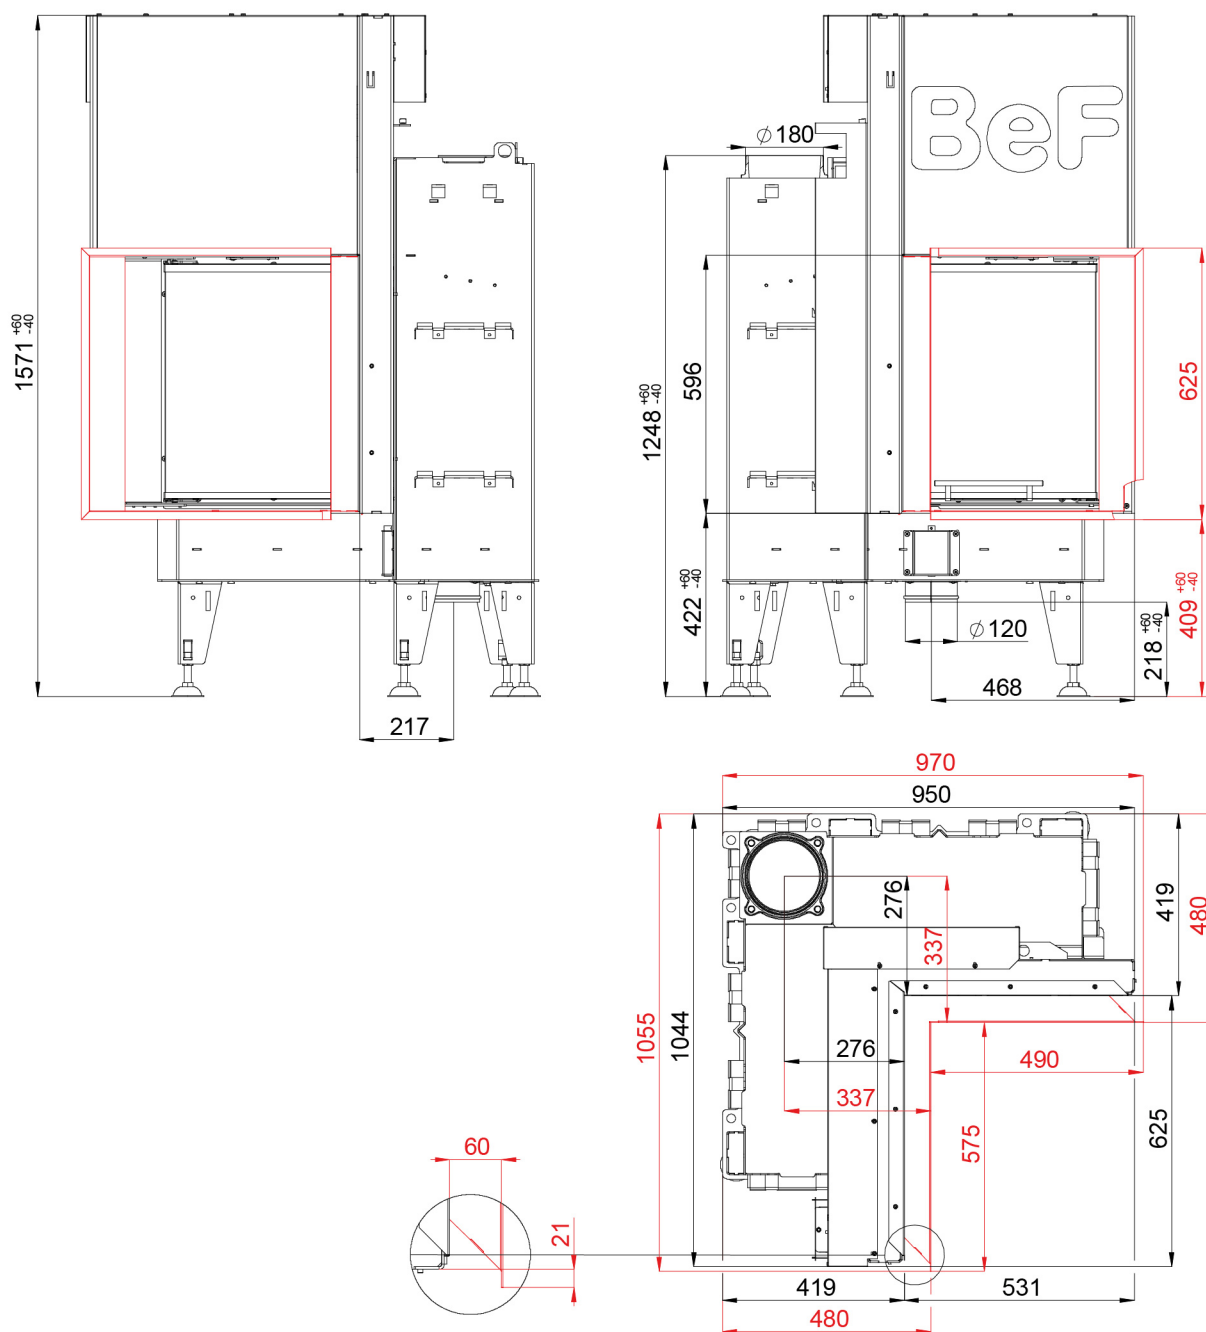

BEF FLAT V 4 L

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

www.befhome.com