
FIREPLACE INSERT BEF THERM V 12 IN ACCORDANCE WITH EN 13 229

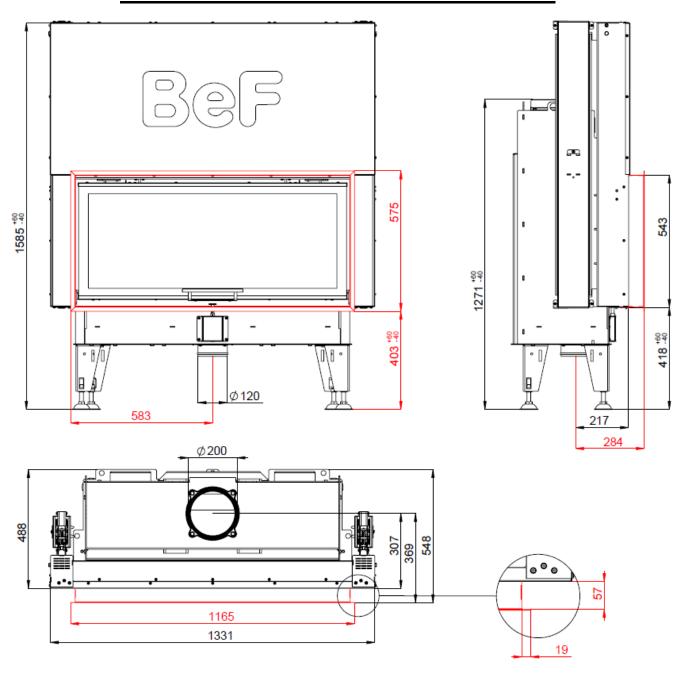


FIREPLACE INSERT BEF THERM V 12 IN ACCORDANCE WITH EN 13 229

Technical data:

| Nominal heat output | kW | 13,5 |
|---|--------------------|-------------------|
| Efficiency | % | 80,3 |
| Volume flow of combustion products | g/s | 12 |
| Flue-gas temperature | °C | 256 |
| Min. feed pressure at nominal heat output | Pa | 10 |
| Fuel | | wood (beech logs) |
| Fuel consumption per hour | kg/h | 4,0 |
| CO emission in burnt gas (in relation to 13 | % O2) % | 0,0898 |
| Dust in flue-gas (in relation to 13% O2) | mg/Nm ³ | 30 |
| Smoke flue diameter | mm | 200 |
| Weight | kg | |

Set of carcon firebox:

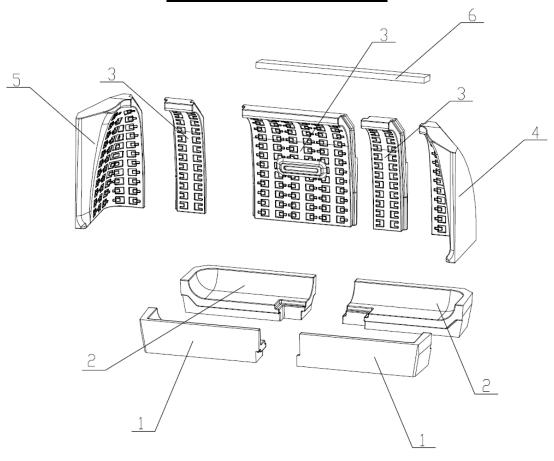

List of spare parts:

- 1. Bottom
- 2. Bottom
- 3. Back
- 4. Side piece
- 5. Side piece
- 6. Deflector
- 7. Cast iron grate
- 8. Ashtray

For details see Installation and Service Instructions.