


SPECIFICATIONS

Rated thermal input	7 kW
Efficiency	81 %
Smoke flue diameter	150 mm
Min. thrust (under pressure) for rated thermal input	12 Pa
Fuel gas temperature	242 °C
Volume of fuel gas	6,6 g/s
CO emissions in fuel gas (at 13 % O ₂)	0,084 %
Dust in the fuel gas (at 13 % O ₂)	22 mg/Nm ³
Volume of fuel per hour	2,2 kg/h
Fuel	wood (beech logs)
Weight	137 kg



LIST OF SPARE PARTS


Glass



600 x 340 x 468 mm
600 x 340 x 468 mm

Carcon stones

1. Front bottom
2. Back bottom
3. Right side
4. Left side
5. Deflector
6. Carcon blend

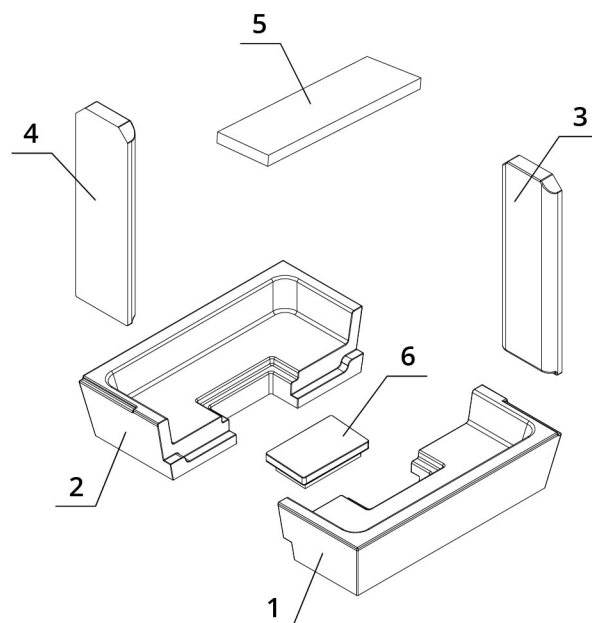

BEF TWIN 7 CL - CL

BlmSchV
Stufe 2


15a
B - VG

ČSN EN
13229

eco
design

www.befhome.com

TECHNICAL DRAWING

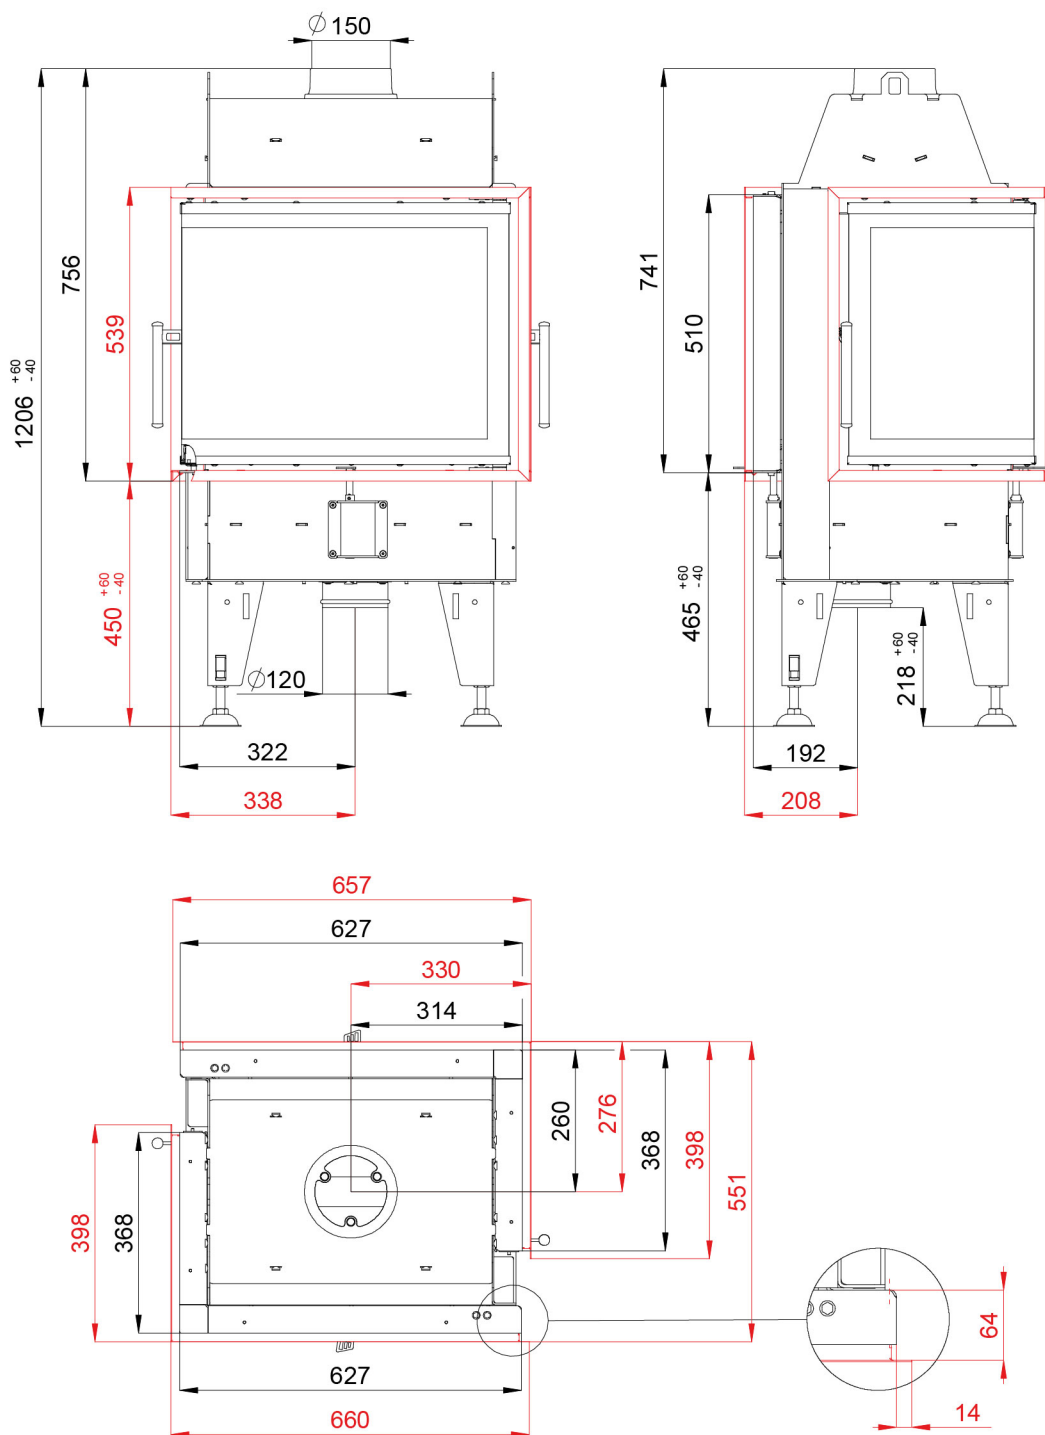

BEF TWIN 7 CL - CL

BImSchV
Stufe 2

15a
B - VG

ČSN EN
13229

www.befhome.com