


SPECIFICATIONS

Rated thermal input	10 kW
Rated thermal input into water	80 %
Efficiency	200 mm
Smoke flue diameter	12 Pa
Min. thrust (under pressure) for rated thermal input	240 °C
Fuel gas temperature	9,3 g/s
Volume of fuel gas	0,0993 %
CO emissions in fuel gas (at 13 % O ₂)	30 mg/Nm ³
Dust in the fuel gas (at 13 % O ₂)	2,75 kg/h
Volume of fuel per hour	wood (beech logs)
Fuel	197 kg
Weight	



LIST OF SPARE PARTS


Glass



750 x 468 mm
750 x 468 mm

Carcon stones

1. Front bottom
2. Back bottom
3. Right side
4. Left side
5. Deflector
6. Cast iron grid
7. Ash tray

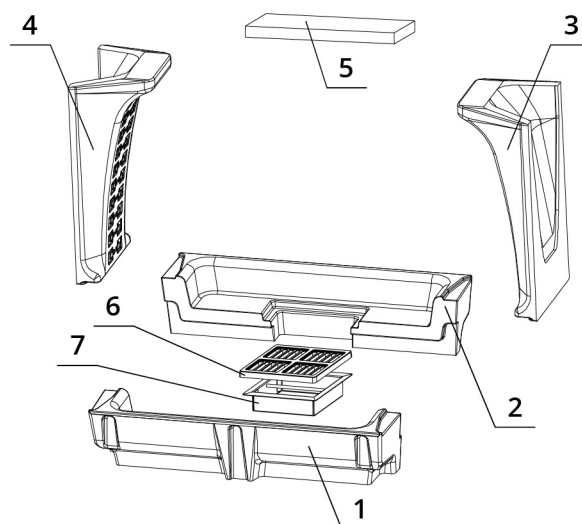

BEF TWIN 8 II.


BImSchV
Stufe 2

15a
B - VG

ČSN EN
13229

www.befhome.com

TECHNICAL DRAWING

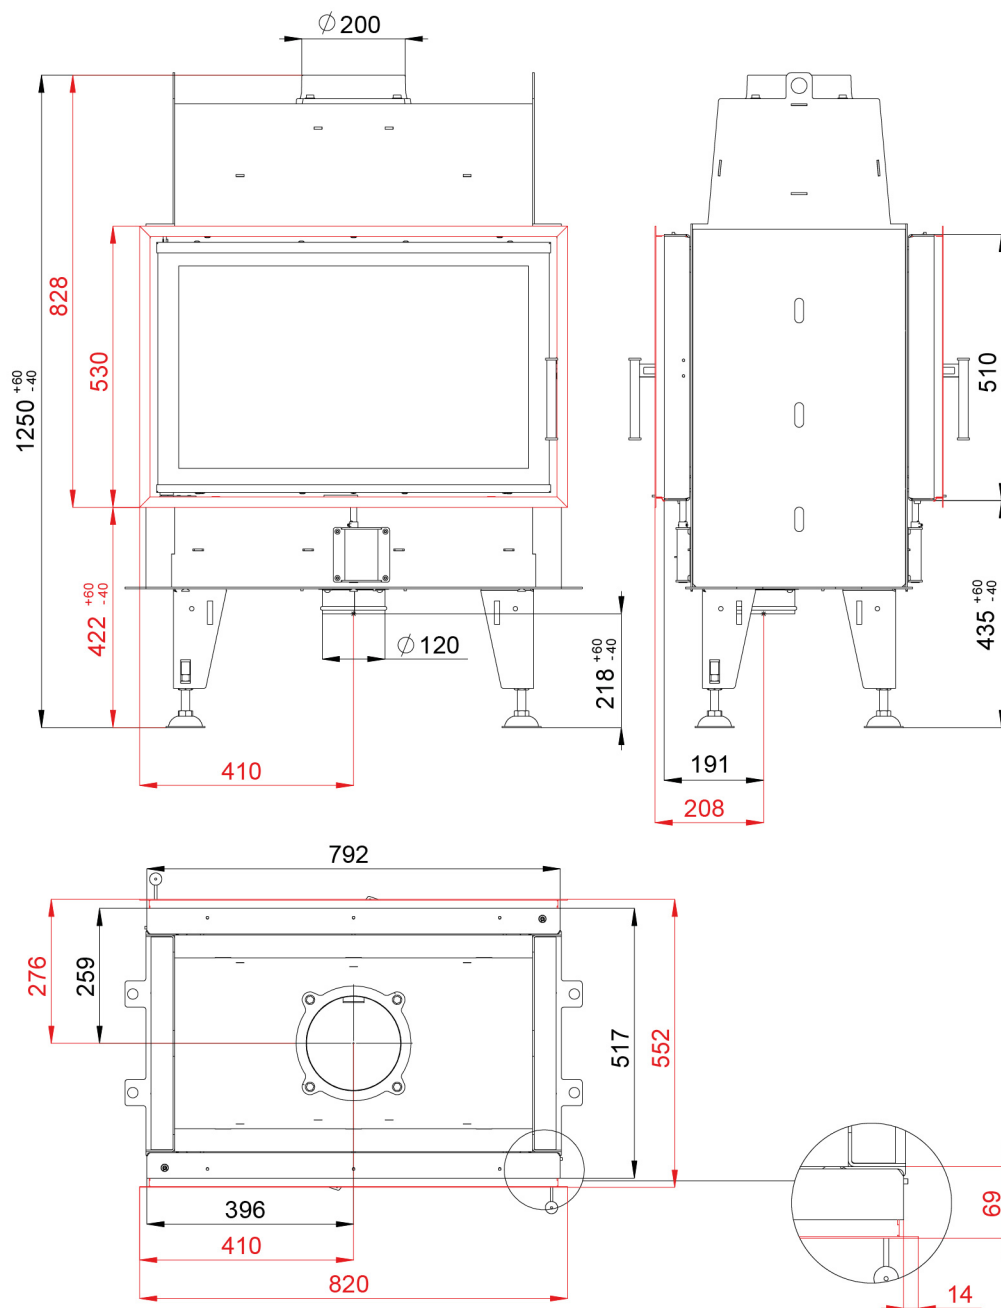

BEF TWIN 8 II.

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

www.befhome.com