


## SPECIFICATIONS

|                                                      |                       |
|------------------------------------------------------|-----------------------|
| Rated thermal input                                  | 7 kW                  |
| Efficiency                                           | 82 %                  |
| Smoke flue diameter                                  | 150 mm                |
| Min. thrust (under pressure) for rated thermal input | 12 Pa                 |
| Fuel gas temperature                                 | 232 °C                |
| Volume of fuel gas                                   | 6,5 g/s               |
| CO emissions in fuel gas (at 13 % O <sub>2</sub> )   | 0,0811 %              |
| Dust in the fuel gas (at 13 % O <sub>2</sub> )       | 18 mg/Nm <sup>3</sup> |
| Volume of fuel per hour                              | 2,47 kg/h             |
| Fuel                                                 | wood (beech logs)     |
| Weight                                               | 123 kg                |



## LIST OF SPARE PARTS

### Glass




670 x 468 mm

670 x 468 mm

### Carcon stones

1. Front bottom
2. Back bottom
3. Right side
4. Left side
5. Cast iron grid
6. Ash tray

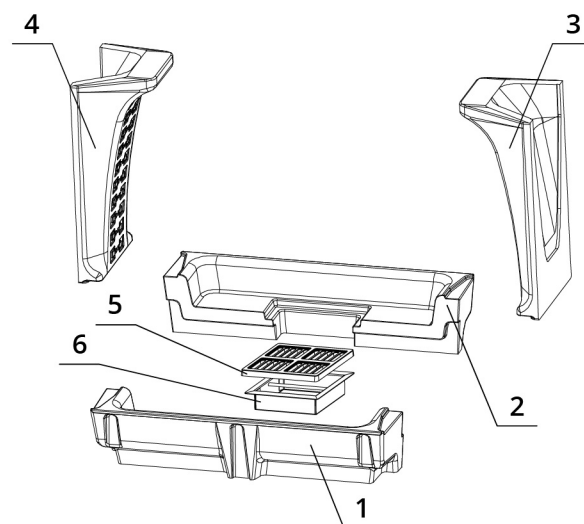

# BEF DOUBLE 7 FEEL


BlmSchV  
Stufe 2

15a  
B - VG

ČSN EN  
13229

[www.befhome.com](http://www.befhome.com)

## TECHNICAL DRAWING

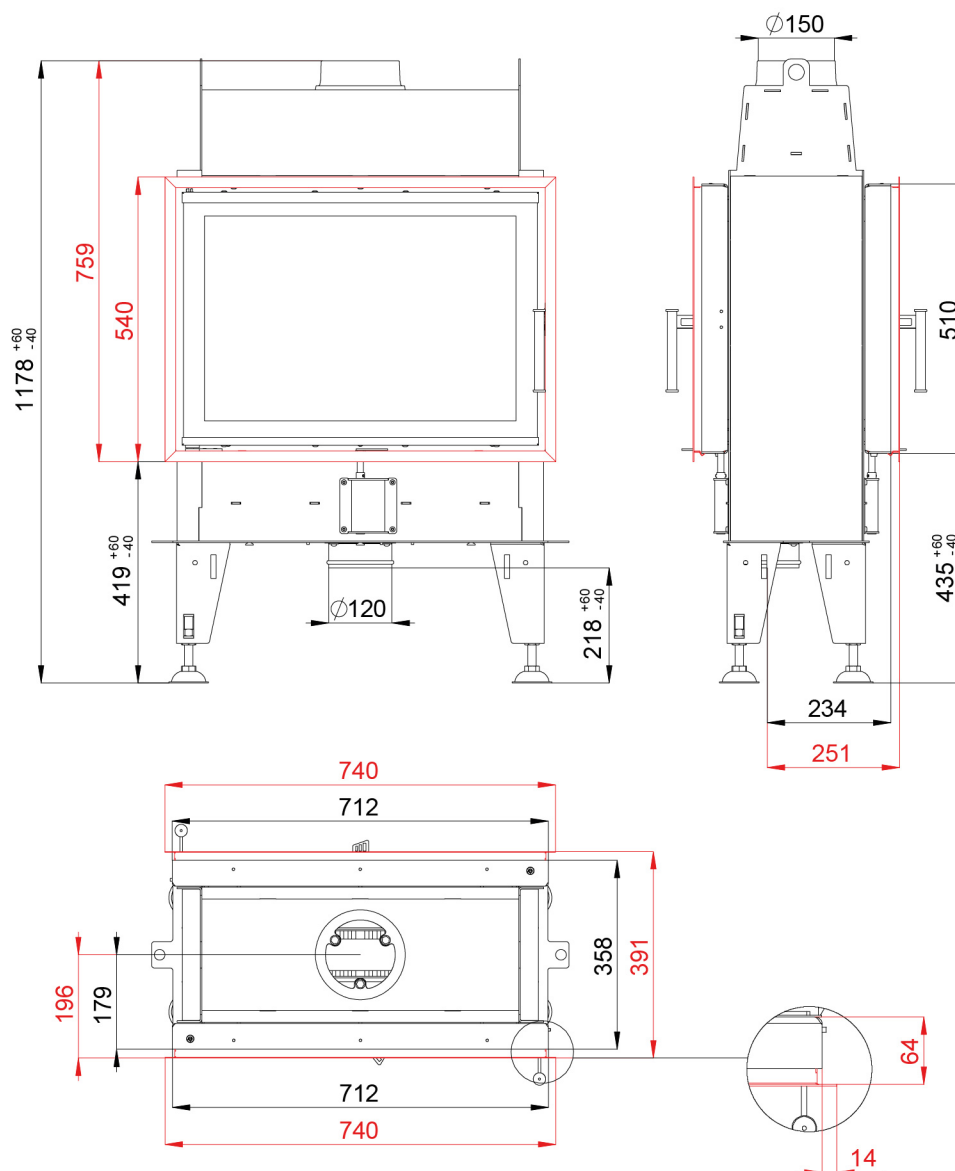

# BEF DOUBLE 7 FEEL

BlmSchV  
Stufe 2

15a  
B - VG

ČSN EN  
13229

[www.befhome.com](http://www.befhome.com)