

## SPECIFICATIONS

|                                                      |                       |
|------------------------------------------------------|-----------------------|
| Rated thermal input                                  | 6 kW                  |
| Efficiency                                           | 83 %                  |
| Smoke flue diameter                                  | 150 mm                |
| Min. thrust (under pressure) for rated thermal input | 12 Pa                 |
| Fuel gas temperature                                 | 194 °C                |
| Volume of fuel gas                                   | 6,6 g/s               |
| CO emissions in fuel gas (at 13 % O <sub>2</sub> )   | 0,0532 %              |
| Dust in the fuel gas (at 13 % O <sub>2</sub> )       | 23 mg/Nm <sup>3</sup> |
| Volume of fuel per hour                              | 1,72 kg/h             |
| Fuel                                                 | wood (beech logs)     |
| Weight                                               | 154 kg                |



## LIST OF SPARE PARTS


### Glass

1x

300 x 300 x 668 mm

### Carcon stones

1. Front bottom
2. Back bottom
3. Back
4. Right side
5. Left side
6. Deflector
7. Cast iron grid
8. Ash tray

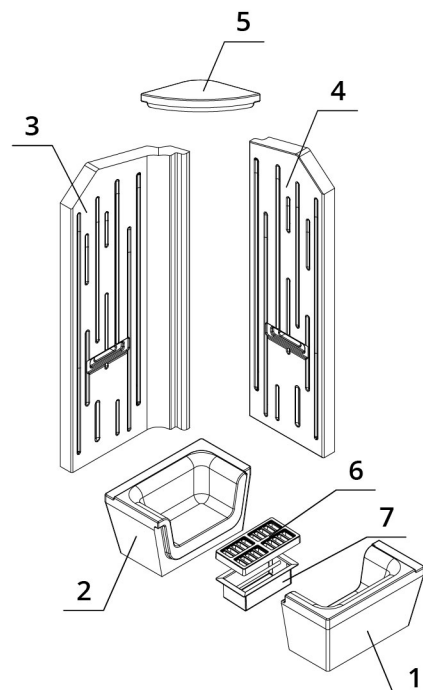

# BEF ARIES 7 E


BlmSchV  
Stufe 2

15a  
B - VG

ČSN EN  
13229

[www.befhome.com](http://www.befhome.com)

## TECHNICAL DRAWING

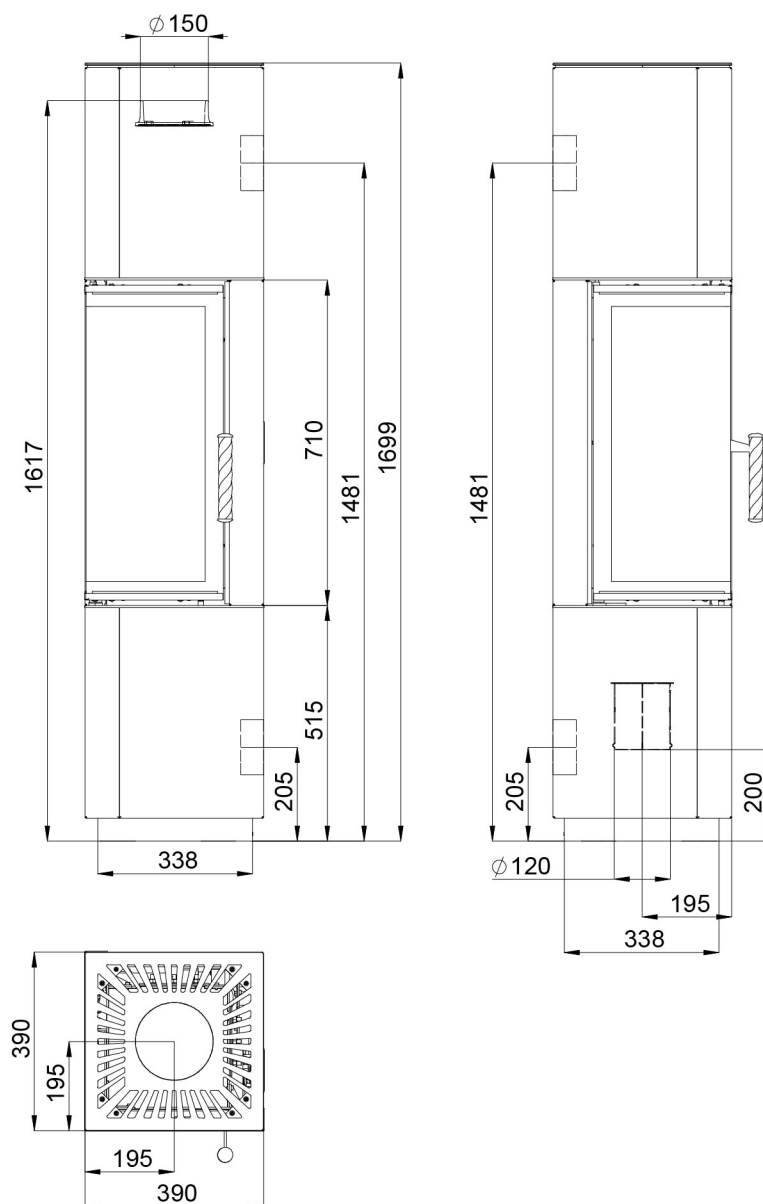

# BEF ARIES 7 E

BlmSchV  
Stufe 2

15a  
B - VG

ČSN EN  
13229

[www.befhome.com](http://www.befhome.com)